




RIELLOTECH CLIMA COMFORT

RIELLO
Energy For Life

Контролни табла

RIELLOtech Clima COMFORT

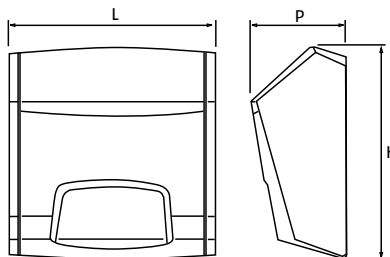

- RIELLOtech е гама от специално разработени от Riello контролни системи за управление на всякакъв вид инсталации

Описание	H mm	L mm	P mm	Нето тегло kg
RIELLOtech CLIMA COMFORT	360	350	165	3
RIELLOtech CLIMA COMFORT	360	350	165	3
CLIMA COMFORT	120	180	50	1
CLIMA DISPLAY	95	140	50	1

RIELLOtech Clima Top control panel is designed for complex and multi-apartment systems.

It can control 1-stage burner, 2-stage burner or a modulating burner. It controls one single generator or more generators in cascade application (in case of cascade applications, it is necessary to use a RIELLOtech Clima Top for each generator, while the maximum configuration consists of 16 generators); it controls complex solar systems and the integration of different kinds of heat generators. It can manage one direct zone and one mixed zone as standard (plus a second mixed zone by means of a specific kit), with room temperature control by means of a thermostat or an indoor probe (one per zone, not included in the control panel supply); it allows an hour-programmable control of heating and DHW production.

One immersion probe and one external sensor are supplied as standard with RIELLOtech Clima Comfort.

All RIELLOtech Clima regulating systems can be connected via BUS.

IPX4D electrical protection.

- It is possible to personalise the control panel through programmable inputs and outputs (e.g. 0/10V input, generator anti-condensation pump)
- Frost protection, anti-blocking pump function and anti-legionnaires' disease protection
- Energy saving thanks to the system thermoregulation according to the external weather conditions
- Easy to program thanks to a user-friendly menu and a large display
- Quick to install: terminals and connectors, identifiable through silk-screen prints, are included in the supply
- Great flexibility of installation: they can be horizontally or vertically installed on the boilers or wall-mounted by means of a specific kit
- A specific version as main control panel for boiler-room is also available (in combination with Clima Display).

ТЕХНИЧЕСКИ ХАРАКТЕРИСТИКИ

Тип	Код	Описание	Бележка
ž	4031064	RIELLOtech CLIMA COMFORT	(1)
Control panel with climatic regulation - vertical installation	4031069	RIELLOtech CLIMA COMFORT	(1)
Climatic regulation for electrical cabinet	20010903	CLIMA COMFORT	
User interface for electrical cabinet	20010906	CLIMA DISPLAY	

/#f1

#

#

ž

АКСЕСОАРИ

Описание	Код
Кит за разширяване на функционалността (специално за Clima COMFORT)	20102310
Кит за управление на двустепенни горелки (за монтаж в Riellotech Prime и Riellotech Prime ACS)	4031067
RIELLOtech кит за степенен монтаж (само за вертикален монтаж)	20010056
Дистанционно управление RC2 (програмируем температурен датчик за помещението)	4334410
Температурен датчик за помещението	20012456
NTC потопяем температурен датчик (10k ohm) - 5 метра	20010068
NTC температурен датчик за бойлер за Б.Г.В. (10k ohm) - 5 метра	20010103
NTC температурен датчик за слънчев колектор (10k ohm)	4031913
NTC контактен температурен датчик (10k ohm)	20008753
NTC външен датчик (10k ohm)	4047947
Кит с релета за модулираща горелка	20013035



“Калория”

1220 София, ул. История славянобългарска № 8
тел.: 831-11-30, 831-11-31 факс: 831-11-34
GSM: 0898 45 15 05, 0878 91 33 14

www.caloria.bg; riello@techno-link.com

RIELLO